

Standard Pavers



Photo courtesy of Blue Pine Enterprises

Standard - Northern Shadow

The original paving stone shape offers contemporary elegance for commercial and residential projects.



INDIVIDUAL SIZES:



Half Standard

Standard

Double Standard

Size (in)		Pcs / Sqft	Sqft / Pal	Shipping Weight	Pcs / Pal
Half Standard 4-7/16" x 4-7/16" x 2-3/8" 112.5mm x 112.5mm x 60mm		7.2	98	1225kg / 2700lbs	720
Standard 8-7/8" x 4-7/16" x 2-3/8" 225mm x 112.5mm x 60mm		3.6	98	1225kg / 2700lbs	360
Double Standard 8-7/8" x 8-7/8" x 2-3/8" 225mm x 225mm x 60mm		1.8	98	1225kg / 2700lbs	180

All sizes including 3 mm Spacer Bars

RECOMMENDED APPLICATIONS





Patios



Walkways




Residential Driveway/Parking

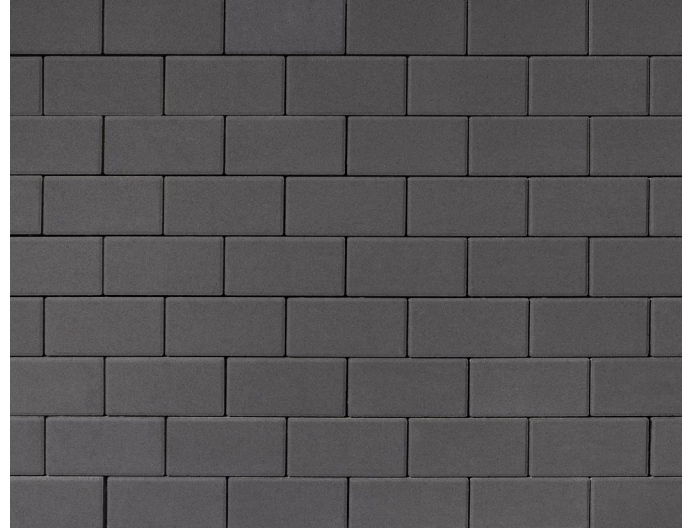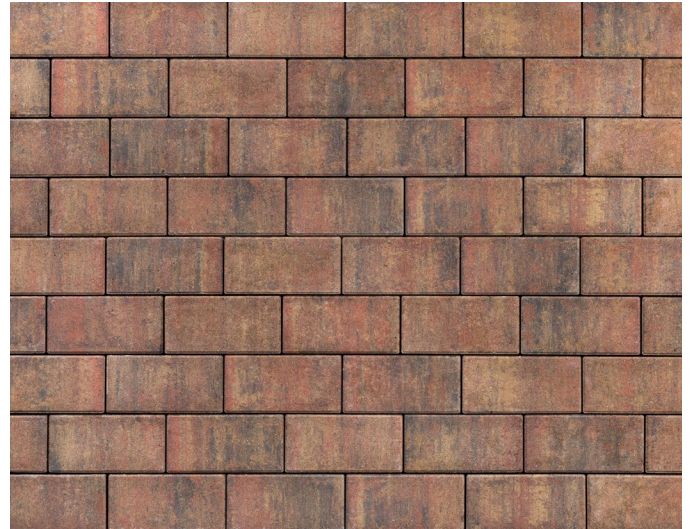**Natural****Charcoal****Northern Shadow****Somerset**

Installation Instructions:


Permeable Installation

FULL EXFILTRATION

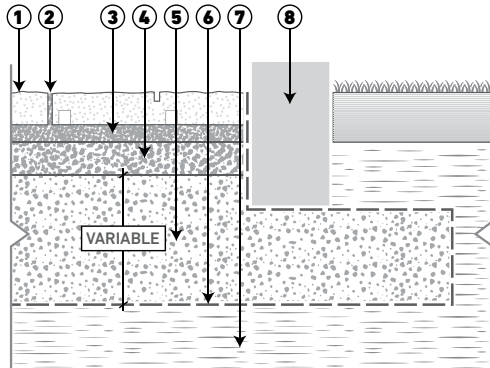

- 1 Paver
- 2 Joint filling material ASTM No 10 (CSA 2-3mm) aggregate
- 3 Bedding course 1 1/5" to 2" (40 to 50 mm) ASTM No 8 (CSA 2.5-10mm) aggregate
- 4 Base course 4" (100mm) ASTM No 57 (CSA 5-28mm) aggregate foundation thickness
- 5 Subbase course ASTM No 2 (CSA 40-80mm) aggregate
- 6 Geotextile (optional)
- 7 Subgrade
- 8 Concrete Edge

Sand Set Installation

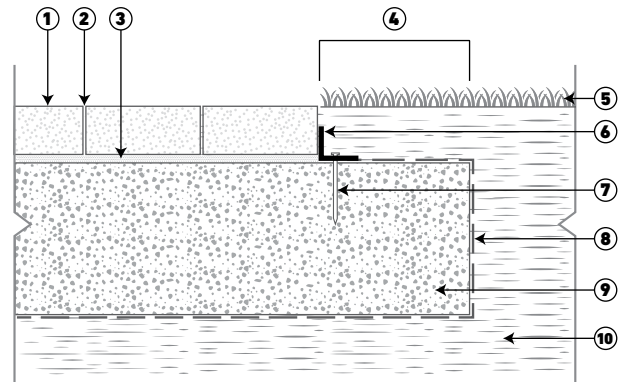

- 1 Paver
- 2 Sand joint fill
- 3 Bedding Sand 1"
- 4 Extra width equal to foundation thickness
- 5 Lawn
- 6 Plastic edge or other type of edge restraint
- 7 Nail
- 8 Geotextile (optional)
- 9 Compacted aggregate base with 3/4" minus material
- 10 Subgrade

H-20
HS-20

All our pavers meet the H-20/H-S20 loading requirements. This determination allows for an occasional heavy vehicle such as a fire truck driving on the pavers. Specific site requirements will determine the appropriate paver usage. For example, heavily trafficked areas require more robust pavers installed in specific laying patterns.

For more information on H-20/HS-20 Loading, please visit:
www.newstonegroup.ca/H-20-HS-20-Loading.pdf



Scan QR code
for more information